


# Cuthbert Circuit Plan

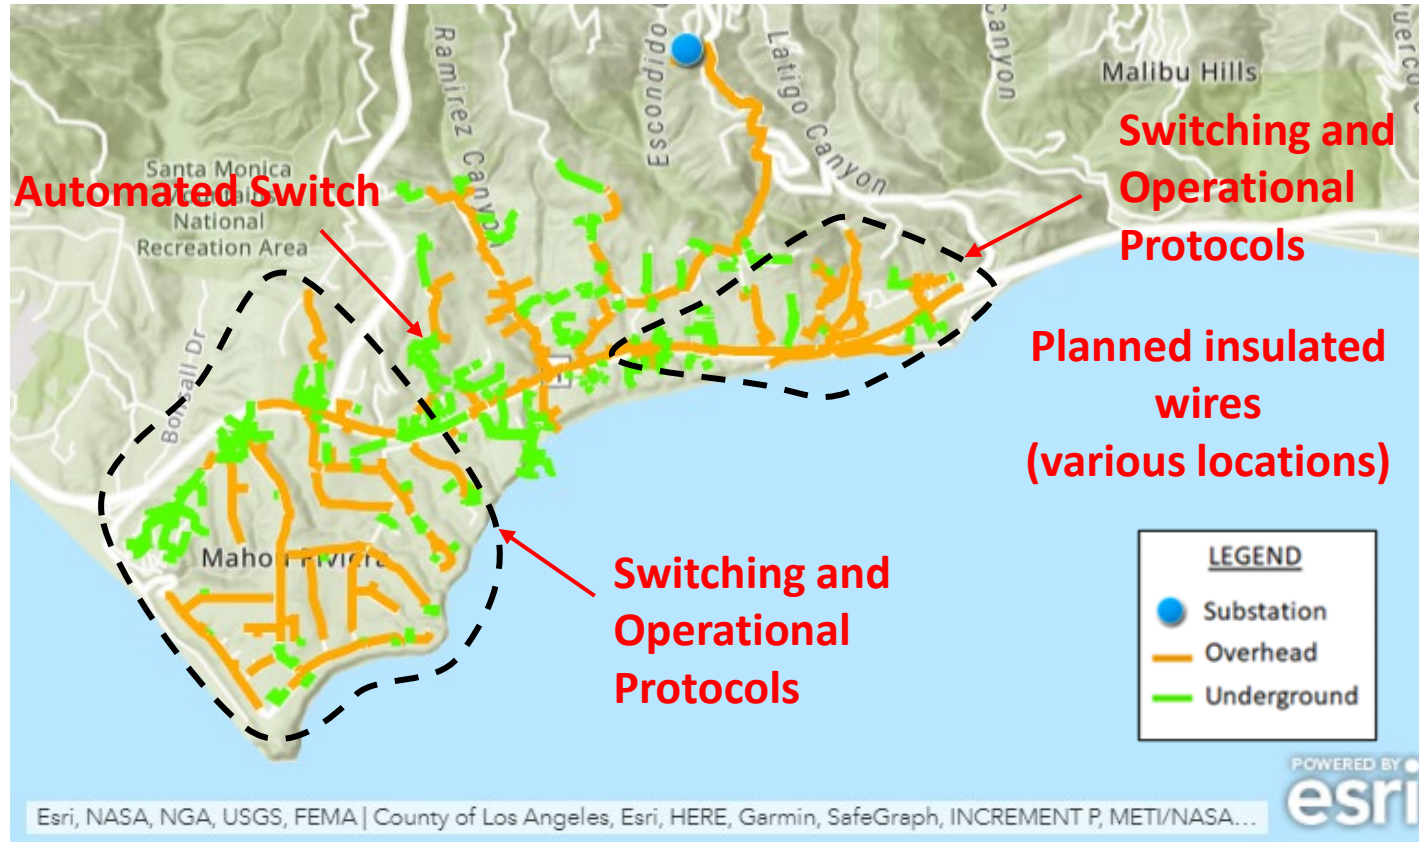

## Planned Work:

- Insulated Wires: Replace 0.8 miles of existing overhead wire with new insulated wire
- Operational Protocols: Implement to raise PSPS windspeed thresholds
- Switching Protocols: transfer load to a less affected circuit
- Install 1 automated switch

## Expected Improvements:

- **93% reduction** in customer outage time, assuming the same weather conditions in 2020