
Appendix A – WDAT493



QUEUE CLUSTER 3 & 4 PHASE II REPORT

November 9, 2012

This study has been completed in coordination with Southern California Edison per CAISO Tariff Appendix Y Generator Interconnection Procedures (GIP) for Interconnection Requests in a Queue Cluster Window.

Table of Contents

A. Executive Summary	1
B. Project Information and Interconnection Details	2
C. Interconnection Facilities, Network Upgrades, and Distribution Upgrades.....	3
D. Cost and Construction Duration Estimates	7
E. Study Assumptions	9
F. Power Flow Analysis.....	10
G. Short Circuit Analysis.....	10
H. Transient Stability Evaluation.....	11
I. Reactive Power Deficiency Analysis	11
J. Deliverability Assessment.....	12
K. Operational Studies	12
L. Environmental Evaluation/Permitting	12
M. Items not covered in this study	13

Attachments:

1. Not Used
2. Not Used
3. Distribution Provider Interconnection Handbook
4. Short Circuit Calculation Study Results (see Appendix H of the group report)

A. Executive Summary

[REDACTED] the Interconnection Customer (IC), has submitted a completed Interconnection Request (IR) to the Southern California Edison Company (SCE) for their proposed [REDACTED] (Project) under the terms of SCE's Wholesale Distribution Access Tariff (WDAT). The Project has requested Energy Only Deliverability status and is comprised of photovoltaic modules with an output of 0.5 MW to the requested Point of Interconnection (POI) on SCE's Warm Creek 12 kV distribution line. The generated power would be delivered to the California Independent System Operator ("CAISO") grid at the 220 kV¹ bus of San Bernardino Substation. The IC requested Commercial Operation Date for the Project is [REDACTED]

Pursuant to the Generator Interconnection Procedures (GIP) for Interconnection Requests in a Queue Cluster Window (CAISO Appendix Y), including Appendix 8 of the GIP (Transition of Existing SGIP Interconnection Requests to the GIP) under the terms of SCE's WDAT, the Project was grouped with the Queue Cluster 3&4 (QC3&4) Phase II Study (Phase II) projects to determine the impacts of the group as well as impacts of the Project on the CAISO Controlled Grid and SCE's distribution system.

The group report has been prepared separately identifying the combined impacts of all QC3&4 Phase II projects on the CAISO Controlled Grid. This report focuses only on the impacts of the Project. This report focuses only on the impacts or impact contributions of this Project, and it is not intended to supersede any contractual terms or conditions specified in an interconnection agreement.

The report provides the following:

1. Transmission and Distribution system impacts caused by the Project;
2. System reinforcements necessary to mitigate the adverse impacts caused by the Project under various system conditions;
3. A list of required facilities and a non-binding, good faith estimate of the Project's cost responsibility and time to construct these facilities.

The QC3&4 Phase II Study was performed to determine problems for which mitigation plans may be proposed for the Project. Mitigation plans for the Project are detailed in Section C of this report.

The QC3&4 Phase II Study has determined that the Project contributes to various reliability and/or deliverability problems for which mitigation plans have been proposed. These mitigation plans are detailed in Section C of this report.

The non-binding SCE cost estimates to interconnect the Project are:

Interconnection Facilities	\$ 34,000
ITCC for Interconnection Facilities	\$ 12,000
Distribution Upgrades	\$ 87,000
ITCC for Distribution Upgrades	\$ 30,000

¹ Identification of facility voltages (220 kV) in this QC3&4 Phase II Study are shown consistent with SCE System Operating Bulletin 123. However, all studies were predicated on the base voltages reflected in the Western Electricity Coordinating Council (WECC) base cases. For the SCE bulk power system, the WECC base cases reflect 230 kV and 500 kV base voltages; consequently, all per-unit calculations presented were based on 230 kV and 500 kV voltages.

The non-binding cost estimate of Interconnection Facilities² and Distribution Upgrades³ to interconnect the Project is approximately \$46,000 and \$117,000 respectively, including ITCC⁴.

The non-binding schedule to license, engineer, and construct the Interconnection Facilities and Distribution Upgrades is approximately 6 months from the signing of the Generator Interconnection Agreement and the receipt of all required information & funding, and from SCE specified milestones associated with applicant responsibilities.

B. Project Information and Interconnection Details

All equipment and facilities comprising the [REDACTED] Mill generating facility located in San Bernardino, California, as disclosed by the Interconnection Customer in its Interconnection Request, as may have been amended during the Interconnection Study process, which consists of (i) [REDACTED] Solaron 500 kW inverter (ii) photovoltaic panels.

Table B.1 provides a summary of the project information and Figure B.1 provides a map of the project location and transmission facilities in the vicinity.

⁴ These upgrades are not part of the SCECC Controlled Grid, and are not reimbursable.
⁴ Income Tax Component of Contribution. The ITCC Included in this cost estimate was computed using a 35% rate.

Upgrades

The Distribution Provider's Interconnection Facilities, Network Upgrades and Distribution Upgrades described in this section are based on the Distribution Provider's preliminary engineering and design. Such descriptions are subject to modification to reflect the actual facilities constructed and installed following the Distribution Provider's final engineering and design, identification of field conditions, and compliance with applicable environmental and permitting requirements.

1. Interconnection Facilities.

- (a) **Interconnection Customer's Interconnection Facilities:** The study assumes that the Interconnection Customer will:
 - (i) Install a 12 kV switchgear ("Last Structure") within the Interconnection Customer's property line, designed and engineered in accordance with the Distribution Provider's specification, to terminate the Distribution Provider's cable.

- (ii) Install disconnect facilities in accordance with the Distribution Provider's Interconnection Handbook to comply with the Distribution Provider's switching and tagging procedures.
 - (iii) Install a breaker within the Interconnection Customer's property line in accordance with the Electrical Service Requirements to comply with the Distribution Provider's protection requirements. Additional protection requirements may be required.
 - (iv) Install a three phase transformer rated for 12/0.480 kV 0.5 MVA with 5.5% impedance on a 0.5 MVA base.
 - (v) Install all required ISO-approved compliant metering equipment at the Small Generating Facility, in accordance with Section 10 of the ISO Tariff.
 - (vi) Allow the Distribution Provider to install revenue meters and appurtenant equipment required to meter the retail load at the Small Generating Facility.
 - (vii) Provide switchgear drawings which shall comply with Distribution Provider's Electrical Service Requirements of which can be obtained at:
<http://www.sce.com/AboutSCE/Regulatory/distributionmanuals/esr.htm>
- (b) **Distribution Provider Interconnection Facilities:** The Distribution Provider's Interconnection Facilities are comprised of the Interconnection Customer-Constructed Interconnection Facilities and the Distribution Provider-Constructed Interconnection Facilities.
- (i) **Interconnection Customer-Constructed:** The Interconnection Customer shall:
 1. Perform underground civil work per Distribution Provider's design, specifications, requirements and acceptance (including but not limited to all necessary trenching, backfilling, and other digging as required, and furnishing and installing of all necessary substructures, conduits and protective structures), for new 12 kV underground line (refer to Section C.1.(b)(ii)2 below) from the distribution new 4-Way Gas Switch towards the Interconnection Customer's 12 kV switchgear's pull section.
 2. Obtain all necessary permits and easements associated with installation of Interconnection Customer-Constructed Interconnection Facilities.
 3. Provide all engineering and design drawings and bills of material associated with the Interconnection Customer-Constructed Interconnection Facilities
 4. Permit Distribution Provider to inspect the construction being done pursuant to this Section C.1.(b)(i)1. In the event the work is not being completed pursuant to Distribution Provider's requirements, Distribution Provider will be permitted to assume work, with costs to be charged to Interconnection Customer. Prior to any such assumption of work, Interconnection Customer shall be provided with thirty (30) days written notice of Distribution Provider's intention to assume work and to cure any defects in, or concerns relating to, that construction to Distribution Provider's satisfaction.
 5. Immediately transfer ownership of, and transfer title to each and every component part thereof, to Distribution Provider free and clear of all liens and encumbrances, upon Interconnection Customer's completed construction, and subject to Distribution Provider's approval of those facilities.

6. If applicable, provide the following:
 - a. Completed Interconnection Customer information sheet.
 - b. Street improvement plans
 - c. Unique address for point of interconnect
 - d. Public right-of-way (street) base maps as required by the interconnection
 - e. Site plot plan on a 30:1 scale digital file as follows:
 1. Easements/lease agreement
 2. Grading plans
 3. Sewer and storm plot plans
 4. Landscape, sprinkler, pedestal locations
 5. Complete construction of underground systems for the Distribution Provider's Interconnection Facilities and Distribution Provider's Distribution Upgrades.
 6. Ensure all underground civil facilities are approved and released by the Distribution Provider's Underground Inspector.

(ii) **Distribution Provider-Constructed:** The Distribution Provider shall:

1. Install approximately 750 feet of 1/0 JCN 12 kV primary underground line extension to the Interconnection Customer's 12 kV switchgear's pull section.
2. Telecommunications – None.
3. Real Properties, Transmission Project Licensing, and Corporate Environmental Services.

Obtain easements and/or acquire land, obtain licensing and permits, and perform all required environmental activities, as necessary, for the installation of the Distribution Provider's Interconnection Facilities.

4. Metering.

Install revenue meters, potential and current transformers, and appurtenant equipment required to meter the retail load at the Generating Facility. Notwithstanding that the meters and appurtenant equipment will be located on the Interconnection Customer's side of the Point of Change of Ownership. The Distribution Provider will own, operate and maintain such facilities as part of the Distribution Provider's Interconnection Facilities.

5. Power System Controls - None.

2. Network Upgrades.

- (a) **Stand Alone Network Upgrades** - None.
- (b) **Other Network Upgrades** - None.

3. Distribution Upgrades - The Distribution Provider shall:

(a) Replace existing 3-Way Gas Switch with a new 4-Way gas switch.

(b) Real Properties, Transmission Project Licensing, and Corporate Environmental Services.

Obtain easements and/or acquire land, obtain licensing and permits, and perform all required environmental activities, as necessary, for the installation of Distribution Upgrades.


4. Point of Change of Ownership.

The Point of Change of Ownership shall be the point where the cable of the Distribution Provider's Warm Creek 12 kV line is attached to the Interconnection Customer's 12 kV pull section terminals at the Last Structure. The Interconnection Customer shall own and maintain the Last Structure, the conductors, insulators and jumper loops from such Last Structure to the Interconnection Customer's Generating Facility.

5. Point of Interconnection.

A position in the new 4-Way Gas Switch from the Distribution Provider's Warm Creek 12 kV Circuit.

6. One-Line Diagram of Interconnection to Warm Creek 12 kV Distribution Line.

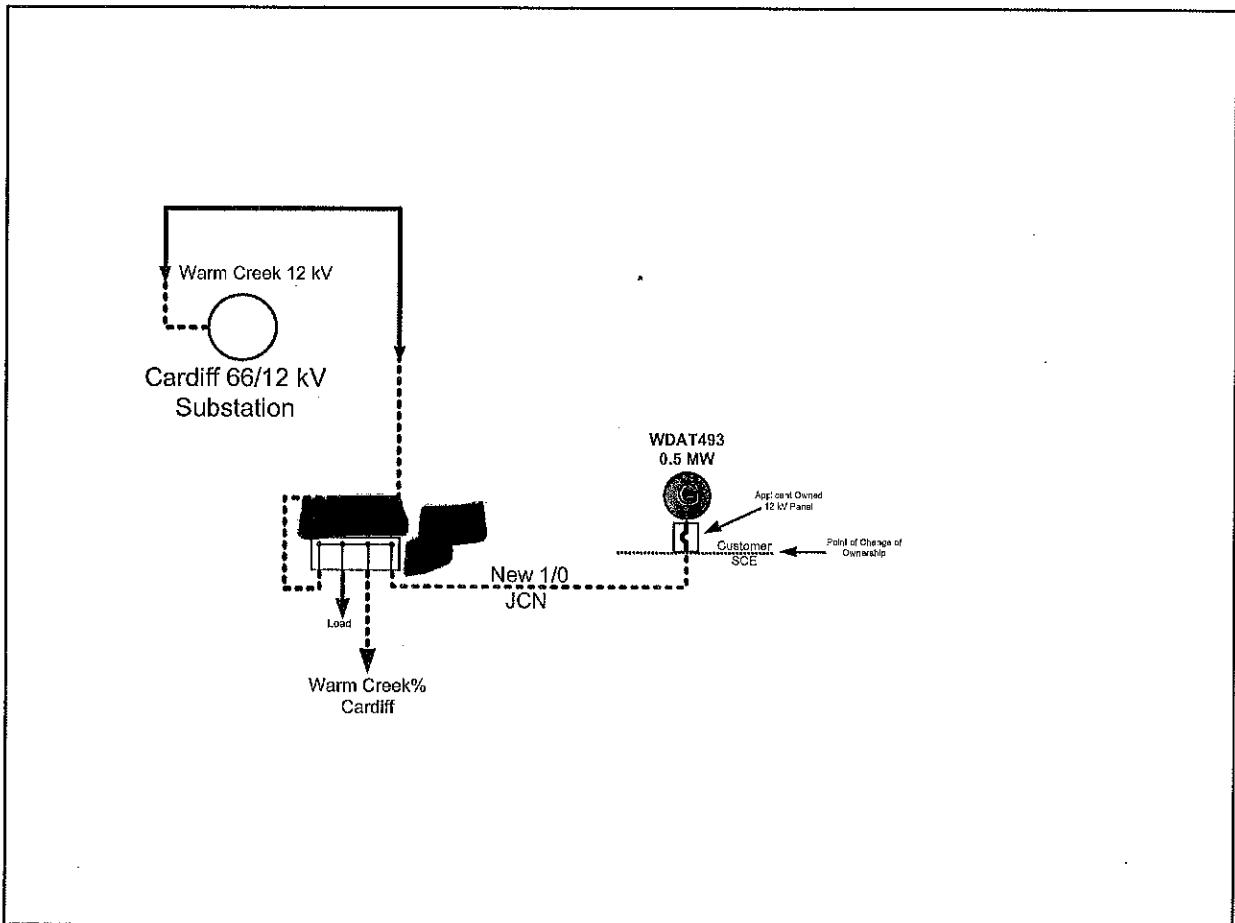

D. Cost and Construction Duration Estimates

Table D.1 below provides the cost responsibility of the Project in 'constant' 2012 dollars and their escalation to the estimated operating date year for Interconnection Facilities, Reliability Network Upgrades, Delivery Network Upgrades, and Distribution Upgrades which the Project was allocated cost. For the QC3&4 Phase II Study, the estimated O.D. is derived by assuming the duration of the work element will begin in [REDACTED] the scheduled completion date of the QC3&4 Phase II Study plus 90 days for the GIA signing period.

Table D.1: Summary of Estimated Costs and Estimated Time to Construct for Interconnection Facilities, Reliability Network Upgrades, Delivery Network Upgrades, and Distribution Upgrades

Element	Interconnection Facilities Cost x 1,000 Constant Dollar (2012)	Reliability Network Upgrades Cost x 1,000 Constant Dollar (2012)	Delivery Network Upgrades Cost x 1,000 Constant Dollar (2012)	Distribution Upgrades Cost x 1,000 Constant Dollar (2012)	ITCC* x 1,000 Constant Dollar (2012)	One Time Cost x 1,000 Constant Dollar (2012)	Total Estimated Cost w/o ITCC x 1,000 Constant Dollar (2012)	Total Estimated Cost x 1,000 Constant Dollar (2012)	Total Estimated Cost x 1,000 Escalated Constant Dollar (OD Year)	Estimated Time to Construct (Note 3)
DP's Interconnection Facilities (Note 1)										
Install approximately 750 ft. of 1/0 JCN primary 12 kV Line	\$34				\$12					
Subtotal	\$34				\$12		\$34	\$46	\$47	6
PTO's Distribution Upgrades										
Replace Existing 3-Way FS with a 4-Way GS				\$87	\$30					6
Subtotal				\$87	\$30		\$87	\$117	\$121	
Total	\$34			\$87	\$42		\$121	\$163	\$168	6

Note 1: The interconnection customer is obligated to fund these upgrades and will not be reimbursed.

Note 2: The interconnection customer is obligated to fund these upgrades and will not be reimbursed. Allocated costs may change if all projects responsible for these upgrades do not execute GIAs.

Note 3: The estimated licensing cost and durations applied to this project are based on the project scope details presented in this study. These estimates are subject to change as project environmental and real-estate elements are further defined. Upon execution of the Interconnection Agreement, additional evaluation including but not limited to preliminary engineering, environmental surveys, and property-right checks may enable licensing cost and/or duration updates to be provided.

Note 4: SCE's QC3&4 Phase II cost estimating is done in 'constant' dollars 2012 and then escalated to the estimated O.D. year. For the QC3&4 Phase II Study, the estimated O.D. is derived by assuming the duration of the work element will begin in March 2013, which is the CAISO tariff scheduled completion date of the QC3&4 Phase II Study plus 90 days for the interconnection agreement negotiations/execution. For instance, if a work element is estimated to take a total of 24 months (permitting, design, procurement, and construction), then the estimated O.D. would be March 2015. If an IC's requested O.D. is beyond the estimated O.D. of a work element, the IC's requested O.D. is used. However, should the Generator Interconnection Agreement not be executed, or the necessary information, funding, and written authorization to proceed is not provided by the IC, in time for the Distribution Provider to perform the work within these time frames, the information provided in Table D.1 may be subject to change.

Note 5: These facilities are not expected to be subject to O&M charges.

E. Study Assumptions

For detailed assumptions, please refer to the QC3&4 Phase II area group report. The following assumptions are only specific to the Project:

1. The following SCE Distribution System Planning Criteria and Conditions were included in the Phase II Study:

- The thermal rating of any conductor, connector, or apparatus should not exceed 100% of its normal rated capacity with all facilities in service (base case).
- The thermal rating of any conductor, connector, or apparatus should not exceed 100% of its emergency rating under N-1 conditions.
- Operational flexibility and reliability of the distribution system shall be maintained at all times.
- Circuit voltage profiles should be maintained to comply within CPUC's Rule 2 requirements.
- The power factor for the new generation facility was assumed to be within WDAT requirements of 0.95 lagging or leading.
- Expected loading on the distribution system as projected by the SCE 2012 - 2021 distribution system plan was used.
- Distributed Generation resources connected to the distribution system are analyzed offline and online during peak load conditions as well as during minimum daytime load conditions as to determine worst case scenario.
- The Short circuit contribution from the inverter systems was determined using inverter manufacturer documents.
- The Phase II Study assumes the upgrades triggered by previously queued projects, including Rule 21 projects under CPUC jurisdiction as in-service, are included in the base case for the Phase II projects. If any previously queued projects were to withdraw, then the Phase II projects may be subjected to the cost identified for those previously queued projects.
- Current distribution standards are being updated to address generation interconnection systems. The proposed method of service in this report may change according on final design to comply with the updated distribution design standards.

2. The following Facilities were estimated and included in the Phase II Study:

- Approximately 750 feet of primary cable (1/0 JCN)
- 12 kV meter, CTs, PTs, and VTs
- Replace existing 3-Way gas switch with a 4-way gas switch

3. The following facilities are to be installed by the Interconnection Customer and are not included in this Phase II Study:

- Ducts as required
- Structures as required
- Point of interconnection breaker
- CAISO metering as required
- Protection Systems required to comply SCE Interconnection requirements

- Transformation as required
- Metering Equipment compliant with SCE Electrical Service Requirements (<http://www.sce.com/AboutSCE/Regulatory/distributionmanuals/esr.htm>)

F. Power Flow Analysis

1. Transmission Level Assessment – 66 kV or above

Please see Section G of the QC3&4 Phase II Eastern area group report for the transmission level power flow analysis discussion and results.

2. Distribution System – 34.5 kV or below

The QC3&4 Phase II distribution study indicated that the Project contributes to the following distribution facility overloads:

(a) Overloaded Distribution Facilities

- Under normal base case conditions, daytime minimum load and maximum generation, the addition of this project did not trigger an overload on any distribution facilities.
- Under emergency (N-1) conditions, daytime minimum load and maximum generation, the addition of this project did not trigger an overload on any distribution facilities. However, due to the dynamic distribution system configurations, SCE may deem it necessary to isolate this project until the distribution system returns to normal conditions.

(b) Recommended Distribution Mitigations – None.

G. Short Circuit Analysis

Short circuit studies were performed to determine the fault duty impact of adding the QC3&4 Phase II projects to the transmission system and to ensure system coordination. The fault duties were calculated with and without the projects to identify any equipment overstress conditions. Once overstressed circuit breakers are identified, the fault current contribution from each individual project in QC3&4 Phase II is determined. Each project in the cluster will be responsible for its share of the upgrade cost based on the rules set forth in CAISO Tariff Appendix Y.

1. Short Circuit Study Input Data

The following input data provided by the Interconnection Customer and was used in this study:

PV Inverter Data for each generation unit (on 0.5 MVA Base):

- X"1 - positive sequence subtransient reactance: 1.0 PU
- X"2 - negative sequence subtransient reactance: 1.0 PU
- X"0 - zero sequence subtransient reactance: 1.0 PU

Generation Step-up Transformers (total of [REDACTED])

Transformer is a three-phase, two winding 12/0.480 kV (D- YG), for 500 kVA with an H-X Impedance Value of 5.5 % @ 500 kVA base.

2. Short Circuit Duty Study Results

All bus locations where the QC3&4 Phase II projects increase the short-circuit duty by 0.1 kA or more and where duty was found to be in excess of 60% of the minimum breaker nameplate rating are listed in the group report Appendix H. These values have been used to determine if any equipment is overstressed as a result of the inclusion of QC3&4 Phase II interconnections and corresponding network upgrades, if any.

The responsibility to finance short circuit related Reliability Network Upgrades identified through a Group Study shall be assigned to all Interconnection Requests in that Group Study pro rata on the basis of short circuit duty contribution of each Generating Facility.

As discussed in the group report, the QC3&4 Phase II breaker evaluation identified overstressed circuit breakers. Per the short circuit methodology for QC3&4 Phase II, the Short Circuit Duty (SCD) mitigation(s) for those overstressed circuit breakers and their associated costs were not allocated to the Project.

(a) SCE Substations with Ground Grids Duty Concerns

The short circuit studies identified substations where the QC3&4 Phase II projects increased the substation ground grid duty by 0.5 kA or more. The SCE substations flagged to have ground grid duty concerns are disclosed in Section H of the QC3&4 Phase II area group report.

3. Preliminary Protection Requirements

Protection requirements are designed and intended to protect the Distribution Provider's system only. The preliminary protection requirements were based upon the interconnection plan as shown in the one-line diagram depicted in line item #6 of Section C of this report.

The applicant is responsible for the protection of its own system and equipment and must meet the requirements in the Distribution Provider's Interconnection Handbook provided in Attachment 3.

H. Transient Stability Evaluation

Please see Sections I and J of the QC3&4 Phase II Eastern area group report for the transient stability evaluation discussion and results.

I. Reactive Power Deficiency Analysis

1. Transmission Level Assessment – 66 kV or above

Please see Section G of the QC3&4 Phase II Eastern area group report for the transmission level reactive power deficiency analysis discussion and results.

2. Individual Project Power Factor Requirements

Based on the results of the Study, the Project will need to be designed to maintain a composite power delivery at continuous rated power at the Point of Interconnection at a power factor within the range of 0.95 leading to 0.95 lagging. Additionally, the generation system must be designed to accommodate a VAR schedule provided by SCE. SCE will determine if the VAR schedule is necessary based on future re-arrangements of SCE's distribution system.

3. Distribution System Power Factor Requirements – 34.5 kV or below

The Warm Creek 12 kV circuit is not expected to experience a voltage rise that exceeds allowable Rule 2 requirements with the Project in service.

J. Deliverability Assessment

No Deliverability Assessment required due to Energy Only status of the Project.

K. Operational Studies

1. IC Proposed Project Timelines

The latest information provided by the IC has indicated that the requested generator In-Service Date is [REDACTED]

2. System Upgrade Timelines for Energy Only Interconnection

The Operational Studies identified that the following facilities are required in order to provide for Energy Only interconnection:

(a) DP's Interconnection Facilities

See Section C.1.b

(b) Distribution Upgrades

The Distribution Upgrades allocated to this project are mentioned in Sections C.1.b.i, C.1.b.ii, and C.3. Timing of such upgrades is tied to the available construction resources to perform the work.

3. System Upgrades Required for Full Capacity Deliverability Status

No Deliverability Assessment required due to the Energy Only status of the Project.

4. Conclusion

The requested generator In-Service Date of [REDACTED] may be met due to the anticipated duration of 6 months for the facilities needed to enable Interconnection. It should be noted that the specified duration of 6 months is from the day an Interconnection Agreement is executed, payments are made, and notice to proceed with Energy Only Interconnection is provided. Consequently, the ability to meet the requested In-Service Date is directly tied to the project's timely execution of the Interconnection Agreement, funding of facilities needed for energy only interconnection, and issuance of notice to proceed. Therefore, in order to have a reasonable chance of meeting the requested In-Service Date, execution of the Interconnection Agreement, submittal of payments, and notice to proceed with Energy Only Interconnection needs to be completed by [REDACTED]

L. Environmental Evaluation/Permitting

Please see Section L of the QC3&4 Phase II area group report.

M. Items not covered in this study

1. Conceptual Method of Service

The results provided in this study are based on conceptual engineering and a preliminary plan of service and are not sufficient for permitting of facilities. The Plan of Service is subject to change as part of Final Engineering and Design.

2. Customer's Technical Data

The study accuracy and results for the QC3&4 Phase II Study are contingent upon the accuracy of the technical data provided by the Interconnection Customer. Any changes from the data provided could void the study results.

3. Study Impacts on Neighboring Utilities

This generation project interconnection may require additional studies, facility additions, and/or operating procedures to address impacts to neighboring utilities. For example, impacts may include but are not limited to WECC Path Ratings, short circuit duties outside of the CAISO Controlled Grid, and sub-synchronous resonance (SSR).

4. Relocations and Other Use of SCE Facilities

The Interconnection Customer is responsible for all costs associated with necessary relocation of any SCE facilities as a result of this project and acquiring all property rights necessary for the Interconnection Customer's Interconnection Facilities, including those required to cross SCE facilities and property. The relocation of SCE facilities or use of SCE property rights shall only be permitted upon written agreement between SCE and the Interconnection Customer. Any proposed relocation of SCE facilities or use of SCE property rights may require a separate study and/or evaluation to determine whether such use may be accommodated, and any associated cost would be non-refundable.

5. SCE Interconnection Handbook

The Interconnection Customer shall be required to adhere to all applicable requirements in the SCE Interconnection Handbook. These include, but are not limited to, all applicable protection, voltage regulation, VAR correction, harmonics, switching and tagging, and metering requirements.

6. Western Electricity Coordinating Council (WECC) Policies

The Interconnection Customer shall be required to adhere to all applicable WECC policies including, but not limited to, the WECC Generating Unit Model Validation Policy.

7. System Protection Coordination

Adequate Protection coordination will be required between SCE-owned protection and Interconnection Customer-owned protection. If adequate protection coordination cannot be achieved, then modifications to the Interconnection Customer-owned facilities may be required to allow for ample protection coordination.

8. Standby Power and Temporary Construction Power

The QC3&4 Phase II Study does not address any requirements for standby power or temporary construction power that the Project may require prior to the In-Service Date of the interconnection facilities. Should the Project require standby power or temporary construction power from SCE prior to the In-Service Date of the interconnection facilities, the

IC is responsible to make appropriate arrangements with SCE to receive and pay for such retail service.

9. Licensing Cost and Duration Estimate (Estimated Construction Schedule)

The estimated licensing cost and durations applied to this project are based on the project scope details presented in this study. These estimates are subject to change as project environmental and real estate elements are further defined. Upon execution of the Interconnection Agreement, additional evaluation including but not limited to preliminary engineering, environmental surveys, and property right checks may enable licensing cost and/or duration updates to be provided.

10. Ground Grid Analysis

The results provided for the ground grid review are preliminary and may be subject to change. A more detailed ground grid analysis will need to be part of the final engineering for the project.

11. Applicability

This document has been prepared to identify the impact(s) contributions of the Project on the SCE electrical system; as well as establish the technical requirements to interconnect the Project in accordance to the Point of Interconnection that was evaluated in the QC3&4 Phase II Study for the Project. Nothing in this report is intended to supersede or establish terms/ conditions specified in Interconnection Agreements agreed to by SCE and the Interconnection Customer.

Attachment 1
Not Used

Attachment 2
Not Used

Attachment 3

Distribution Provider Interconnection Handbook

Preliminary Protection Requirements for Interconnection Facilities are outlined in the Distribution Provider Interconnection Handbook.

Attachment 4

Short Circuit Calculation Study Results

Please refer to the Appendix H of the group report.